

Garden Road Paving 2024



Please be advised that the division of Municipal Infrastructure of the Department of Transportation and Infrastructure have updated the Municipal Water, Sewer, and Roads Master Construction Specifications, and will continue to the enforcement of strict adherence to these specifications.

The specification is currently available online at:

<https://www.gov.nl.ca/ti/mi/mwsr/#spec>

“These project documents have been prepared for use with and require being read in conjunction with the “Municipal Water, Sewer and Roads Construction Specifications” latest revision, as published by the Department of Municipal Affairs Province of Newfoundland and Labrador.

34 Salmonier Line
Holyrood, NL, Canada
A0A 2R0

p. +1-709-229-7252
Robert Stacey

Robert.Stacey@Holyrood.ca
www.holyrood.ca

INDEX

Town of Holyrood

Town of Holyrood Garden Road Paving 2024

	<u>Page</u>
Title Page	(1)
Index	(2)
Instruction to Bidders	(3)
List of documents and description of work	(4)
Specifications & Addenda	(5)
Tender Form	(6)
Garden Road google earth shot, swale & outfall drawing	(7-8)

COR CERTIFICATION

to be produced before the award.

The NLCSA administers the COR program to help ensure OHS standardization for the province's construction companies. Until recently there have been three categories within the NLCSA's COR program. A company could have received a Letter of Good Standing stating *In Process, Audit Pending, or Certificate of Recognition.*

Tenders for contracts that would typically have a COR requirement must use the following language:

The Contractor shall within 14 days of award of the contract, and prior to commencement of the work, provide a Letter of Good Standing stating Certificate of Recognition (COR) certified from the Newfoundland and Labrador Construction Safety Association (NLCSA)."

Instruction to Bidders

Town of Holyrood

Town of Holyrood Garden Road Paving 2024

Project Team

Owner: Town of Holyrood
P.O. Box 100
Holyrood, NL
A0A 2R0

Consultant: Town of Holyrood

Date: August 21, 2024

Project Number: Town of Holyrood Garden Road Paving 2024

RFQ Closing Date: Sept 3, 2024, 12:00pm
Work Completion Date: Sept 30, 2024

All work to be done in conjunction with “**Municipal Water, Sewer and Roads Construction Specifications**” latest revision, as published by the Department of Municipal Affairs Province of Newfoundland and Labrador.

[Bids can be submitted to the Town Office at 34 Salmonier Line by Tuesday Sept. 3rd, 12:00pm.](#)

[In an envelope clearly marked ATTN: Robert Stacey “Town of Holyrood Garden Road Paving 2024.”](#)

[E-mail submissions can be sent to robert.stacey@holyrood.ca](mailto:robert.stacey@holyrood.ca)

Town of Holyrood

Town of Holyrood Garden Road Paving 2024

List of documents and description of work

1. List of Spreadsheet

N/A

2. Site of the works

The Site of the Works in the Town of Holyrood, NL

3. Description of the Works

The scope of work under this RFQ includes:

1. Reshaping of existing ditching approximately 100m of the low side of the road.
2. Preparing the roadway for asphalt with class A.
3. Installing 106m of 50mm of asphalt with a minimum of 2% slope toward the ditch,
4. Installation of a swale along the ditch side of the road with a minimum of four (4) outfalls to the ditch,
5. Minimum of 0.5 m shouldering.
6. Asphalt to be tied into the asphalt on Cove Road approximately 18.5 m in width and paved driveways on Garden Road.

Google Earth shot attached for additional information.

Specifications

Town of Holyrood

Town of Holyrood Garden Road Paving 2024

“These project documents have been prepared for use with and require being read in conjunction with the “Municipal Water, Sewer and Roads Construction Specifications” latest revision, as published by the Department of Municipal Affairs Province of Newfoundland and Labrador.

Please be advised that the division of Municipal Infrastructure of the Department of Transportation and Infrastructure have updated the Municipal Water, Sewer, and Roads Master Construction Specifications, and will continue to the enforcement of strict adherence to these specifications.


The specification is currently available online at:
<https://www.gov.nl.ca/ti/mi/mwsr/#spec>

All culverts/catch basins must be free and clear of any obstruction once painting is complete.

Contractor responsible for the proper disposal of all materials removed.

The contractor will leave all areas in a clean, tidy condition once the paving has been complete.

Contractor responsible for damage to Town owned Infrastructure and private property.

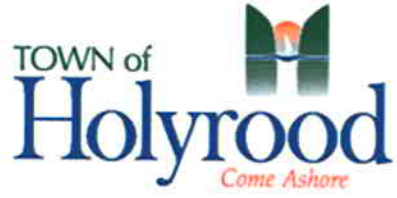


NAME OF CONTRACTOR/TENDERER:

Print_X _____ Signature_X _____

ADDRESS:

Total Tender Amount Total including HST inclusive.

Town of Holyrood Garden Road Paving 2024

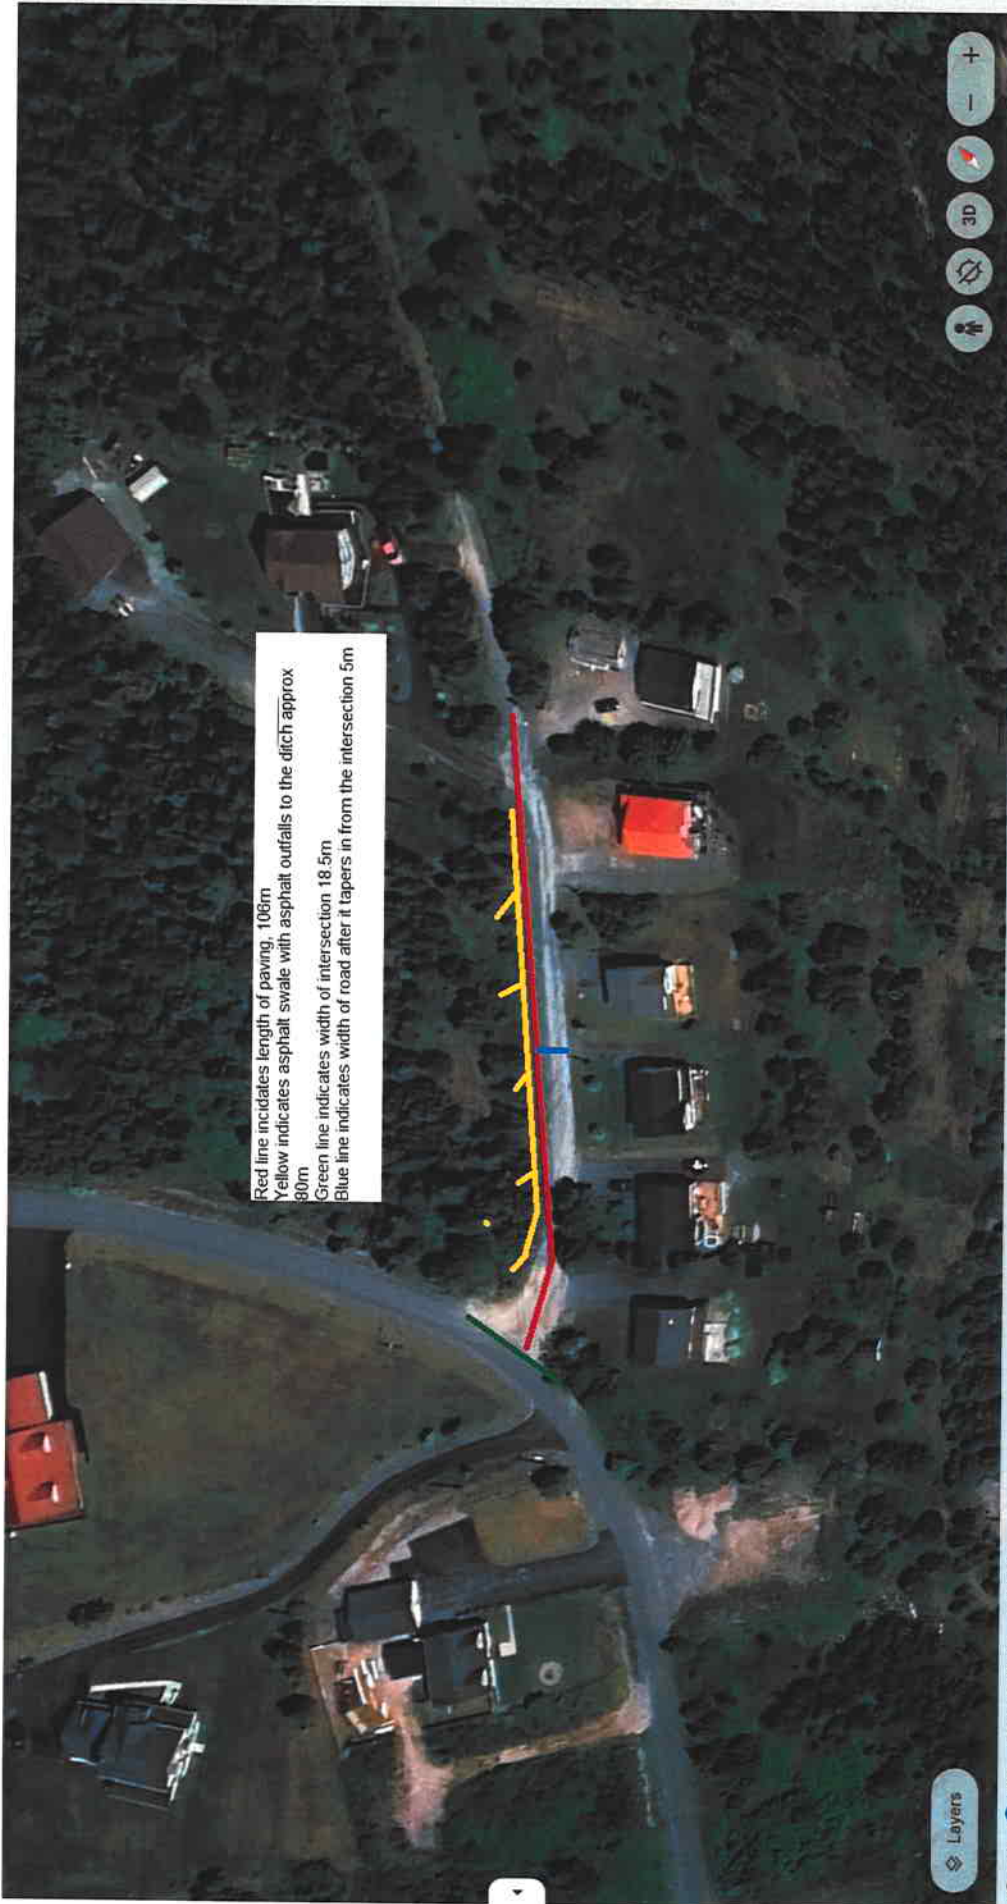

Red line indicates length of paving, 106m
Yellow indicates asphalt swale with asphalt outfalls to the ditch approx 80m
Green line indicates width of intersection 18.5m
Blue line indicates width of road after it tapers in from the intersection 5m


Layers

Google 100% Data attribution 7/21/2023

30 m Camera: 108 m 47°24'35"N 53°08'36"W 21 m

Navigation icons: Home, Street View, 3D, Compass, Zoom In (+), Zoom Out (-)

-NTS-

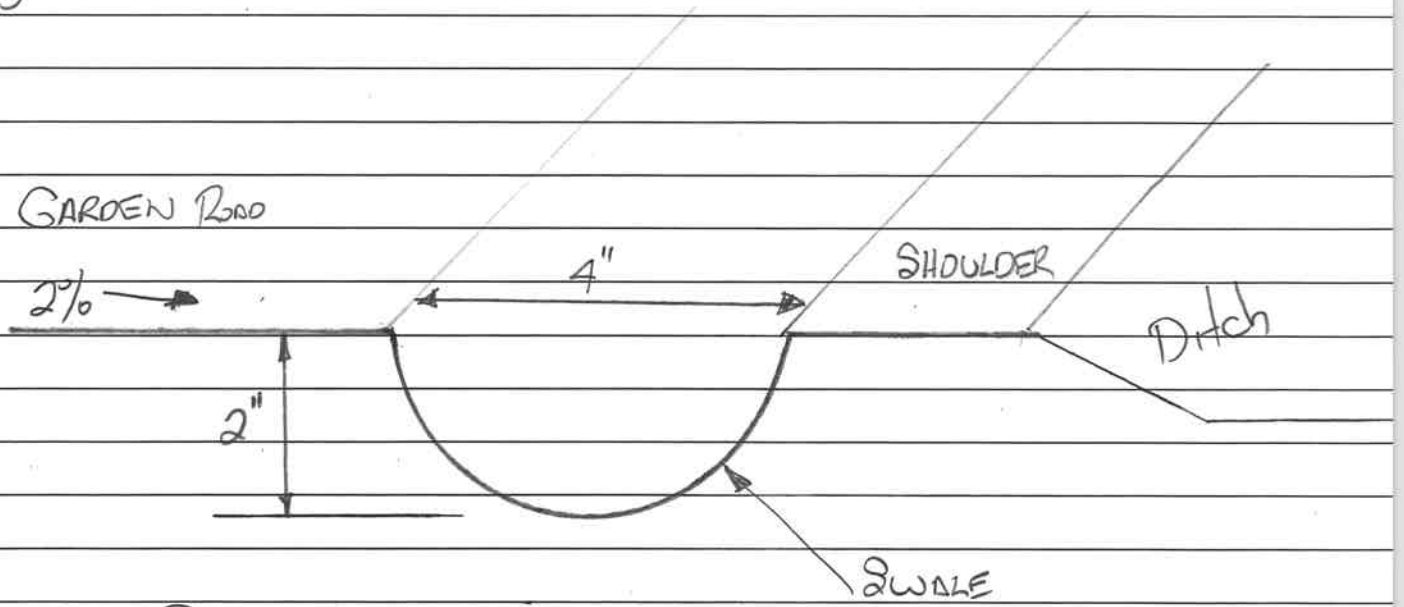

- SWALE DETAIL -

